Errata: Fast and precise iris localization for low-resolution facial images

Chun-Ning Meng
Tai-Ning Zhang
Pin Zhang
Sheng-Jiang Chang

Errata: Fast and precise iris localization for low-resolution facial images

Chun-Ning Meng
Tai-Ning Zhang
Pin Zhang
Sheng-Jiang Chang
Nankai University
Institute of Modern Optics
Key Laboratory of Optical Information Science and
   Technology, Ministry of Education
Tianjin, 300071, China
E-mail: sjchang@nankai.edu.cn

This article [*Opt. Eng.* **51**, 077008 (2012)] was originally published on 18 Jul. 2012 with reversed captions in Figs. 3 and 4. The corrected figures and captions are reprinted below.

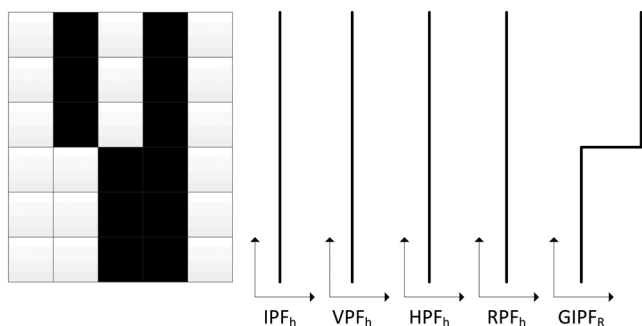The manuscript was corrected online on 20 November 2012.

Fig. 3 Scenario in which $GIPF_R$ is better than IPF_h, VPF_h, and HPF_h in capturing horizontal variation. Each grid represents a pixel or several pixels.
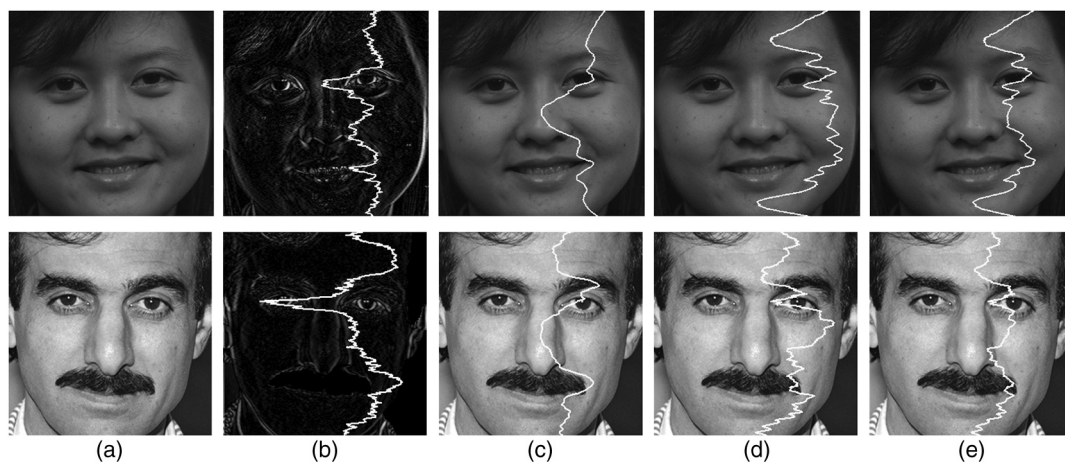

Fig. 4 (a) Original images, (b) GIPFR, (c) horizontal IPF, (d) horizontal VPF, (e) horizontal HPF.